



COSPECT PRESSURE REDUCING VALVE

MODEL COS-3/COS-16

SELF-ACTUATED STEAM CONDITIONING SYSTEM WITH PATENTED PISTON DESIGN

Benefits

Technologically advanced COSPECT Pressure Reducing Valve provides accurate control and steam conditioning to maximize process steam system performance.

1. Combination conditioning system includes pressure reducing valve, condensate separator, and steam trap.
2. Patented SCE separator's 98% efficiency can deliver high quality steam of 99.8% dryness.
3. Resulting dry steam improves heat transfer by 9% average, enhances product quality, speeds batch times, and extends down-stream valve life.
4. Patented Shock-Absorbing Spherical (SAS) piston delivers stable secondary pressure.
5. Valve maintains high accuracy during severe conditions of varying primary pressure and fluctuating flow rates.
6. Internal screens for pilot and main valves extend maintenance-free service.
7. Sizes 3" and larger have internal noise silencers for quiet operation.
8. Designed with PTFE gaskets for inspection ease.



U.S. Pat. 4,860,782

Specifications

Model	COS-3		COS-16	
	Screwed	Flanged	Screwed	Flanged
Connection	3/4, 1	1, 1 1/2, 2	1/2, 3/4, 1	1, 1 1/2, 2, 3, 4
Size (in)	3/4, 1	1, 1 1/2, 2	1/2, 3/4, 1	1, 1 1/2, 2, 3, 4
Body Material	Cast Iron			
Maximum Operating Pressure (psig) PMO	45		250	
Maximum Operating Temperature (°F) TMO	428			
Maximum Allowable Pressure (psig) PMA	250			
Maximum Allowable Temperature (°F) TMA	428			
Primary Pressure Range (psig)	15 – 45		30 – 250	
Adjustable Differential Pressure (psi)	not applicable		10 – 120	
Pressure Adjustment Range (psig)	1.5 – 7		5 – 210	
Maximum Adjustable Secondary Pressure (psig)	7		84% of Primary Pressure (or Primary Pressure minus 10 psi, whichever is lower)	
Minimum Adjustable Secondary Pressure (psig)	1.5		10% of Primary Pressure (or Primary Pressure minus 120 psi, whichever is higher) (except primary pressures 50 through 85 as shown in the Capacity Tables)	
Minimum Adjustable Flow Rate	5% of rated flow rate for 1/2" – 2"; 10% of rated flow rate for 2 1/2" – 4"			
Accuracy of Regulation (psi) AOR	±1 (under steady flow conditions)			
Seat Leakage Rating	Less than 0.1% of rated flow rate			

Connections and sizes in bold are standard



To avoid abnormal operation, accidents or serious injury, DO NOT use this product outside of the specification range. Local regulations may restrict the use of this product to below the conditions quoted.

Capacity Tables

Capacity Table COS-16 (With standard external sensing line)									lb/h
Primary Steam Pressure (psig)	Secondary (Set) Steam Pressure (psig)	Nominal Valve Size							
		½"	¾"	1"	1½"	2"	3"	4"	
Cv Values***		3.8	6.9	11.1	24	37.2	85	128	
30	**20	200	365	590	1335	2070	4730	7125	
	16	235	425	680	1470	2280	5215	7850	
	*4 – 14	240	440	700	1515	2350	5370	8085	
40	**30	205	370	595	1515	2350	5365	8080	
	25	275	500	800	1730	2680	6125	9220	
	*4 – 20	295	535	855	1850	2870	6560	9875	
50	**40	225	410	660	1675	2595	5930	8925	
	30	335	605	970	2100	3255	7440	11205	
	*5 – 25	350	635	1020	2200	3410	7790	11730	
60	**50	245	440	715	1820	2815	6435	9695	
	45	285	520	835	2120	3285	7505	11300	
	40	370	670	1075	2325	3600	8230	12395	
	*5 – 30	405	735	1175	2545	3945	9010	13570	
75	**63	290	530	855	2170	3365	7685	11575	
	60	320	580	930	2370	3670	8390	12635	
	50	445	810	1300	2810	4350	9945	14975	
	*5 – 38	485	880	1410	3050	4730	10805	16270	
85	**71	390	705	1135	2455	3800	8685	13080	
	70	400	725	1165	2520	3905	8930	13445	
	50	525	950	1520	3290	5100	11655	17550	
	*5 – 42	540	980	1570	3400	5270	12040	18130	
100	**84	445	805	1300	2805	4345	9930	14955	
	80	485	880	1415	3060	4740	10825	16305	
	60	600	1085	1740	3770	5840	13340	20090	
	*10 – 50	620	1120	1805	3900	6045	13815	20805	
125	**105	545	985	1590	3435	5325	12165	18315	
	100	595	1075	1730	3740	5800	13250	19950	
	80	710	1290	2075	4490	6955	15890	23930	
	*13 – 63	750	1360	2190	4735	7340	16775	25260	
150	**126	645	1170	1880	4060	6295	14390	21665	
	125	655	1190	1910	4130	6400	14620	22015	
	100	825	1495	2405	5195	8050	18400	27705	
	*30 – 75	885	1605	2580	5575	8640	19745	29735	
175	**147	740	1350	2170	4690	7270	16610	25010	
	145	760	1385	2225	4815	7465	17060	25690	
	120	935	1695	2730	5895	9140	20885	31445	
	*55 – 88	1015	1840	2965	6405	9930	22690	34170	
200	**168	840	1530	2460	5315	8240	18825	28350	
	150	990	1795	2885	6240	9675	22105	33290	
	130	1085	1970	3170	6855	10625	24275	36560	
	*80 – 100	1150	2080	3350	7240	11225	25650	38625	
225	**189	940	1710	2750	5940	9210	21045	31690	
	175	1060	1930	3100	6705	10395	23750	35770	
	150	1200	2180	3500	7565	11730	26795	40350	
	*105 – 111	1280	2325	3740	8085	12530	28630	43115	
250	**210	1040	1890	3040	6570	10180	23265	35035	
	150	1375	2495	4015	8680	13450	30735	46285	
	*130	1405	2555	4110	8885	13770	31460	47380	

* Minimum adjustable secondary pressure ** Maximum adjustable secondary pressure

*** NOTE: The Cv values shown are for the valve in the full fail open position. These values are not to be used for COS sizing, and instead may be used as one of the factors in calculations for safety valve selection.

Capacity Tables

The **COSPECT Pressure Reducing Valve** is designed to use either an external pressure sensing line (Standard) or a built-in internal pressure sensing channel. Parts to activate the latter are available from TLV.

Capacity Table COS-16 (With optional internal sensing channel)									lb/h
Primary Steam Pressure (psig)	Secondary (Set) Steam Pressure (psig)	Nominal Valve Size							
		½"	¾"	1"	1½"	2"	3"	4"	
Cv Values***		3.8	6.9	11.1	24	37.2	85	128	
30	**20, 16	See table on the preceding page							
	14	240	440	700	1515	2350	5370	8085	
	9	105	285	680	1470	2275	5200	7835	
	*4	95	245	645	1390	2155	4930	7425	
40	**30, 25	See table on the preceding page							
	20	295	535	855	1850	2870	6560	9875	
	12	145	520	825	1780	2760	6305	9500	
	*4	105	285	745	1615	2505	5725	8620	
50	**40, 30	See table on the preceding page							
	25	350	635	1020	2200	3410	7790	11730	
	15	215	575	930	2010	3115	7120	10725	
	*5	120	310	815	1770	2740	6265	9435	
60	**50, 45, 40	See table on the preceding page							
	30	405	735	1175	2545	3945	9010	13570	
	18	340	650	1040	2255	3495	7985	12025	
	*5	125	335	875	1890	2935	6695	10085	
75	**63, 60, 50	See table on the preceding page							
	38	485	880	1410	3050	4730	10805	16270	
	23	415	735	1180	2550	3955	9035	13605	
	*5	130	375	915	1985	3070	7015	10560	
85	**71, 70, 50	See table on the preceding page							
	42	540	980	1570	3400	5270	12040	18130	
	25	450	770	1240	2685	4165	9515	14325	
	*5	135	385	930	2015	3130	7160	10795	
100	**84, 80, 60	See table on the preceding page							
	50	620	1120	1805	3900	6045	13815	20805	
	30	545	860	1380	2990	4630	10585	15940	
	*10	150	495	950	2050	3180	7270	10950	
125	**105, 100, 80	See table on the preceding page							
	63	750	1360	2190	4735	7340	16775	25260	
	35	515	915	1470	3180	4945	11300	17020	
	*13	180	555	910	1970	3050	6970	10500	
150	**126, 125, 100	See table on the preceding page							
	75	885	1605	2580	5575	8640	19745	29735	
	50	840	1515	2425	5270	8140	18665	27995	
	*30	420	745	1215	2635	4085	9330	14000	
175	**147, 145, 120	See table on the preceding page							
	88	1015	1840	2965	6405	9930	22690	34170	
	70	805	1475	2385	5145	7960	18220	27330	
	*55	645	1150	1850	3990	6160	14200	21170	
200	**168, 150, 130	See table on the preceding page							
	100	1150	2080	3350	7240	11225	25650	38625	
	80	875	1575	2540	5505	8530	19665	29350	
225	**189, 175, 150	See table on the preceding page							
	111	1280	2325	3740	8085	12530	28630	43115	
	*105	1180	2125	3405	7350	11430	26100	39285	
250	**210, 150, *130	See table on the preceding page							

* Minimum adjustable secondary pressure ** Maximum adjustable secondary pressure


*** NOTE: The Cv values shown are for the valve in the full fail open position. These values are not to be used for COS sizing, and instead may be used as one of the factors in calculations for safety valve selection.

Capacity Tables

Capacity Table COS-3			lb/h			
Pressure Sensing Method	Primary Steam Pressure (psig)	Secondary (Set) Steam Pressure (psig)	Nominal Valve Size			
			3/4"	1"	1 1/2"	2"
	Cv Values***		6.9	11.1	24.0	37.2
With Standard External Sensing Line	15 - 28	**7 - *1.5	240	380	1500	2100
	29 - 45	**7 - *1.5	550	760	1500	2100
With Optional Internal Sensing Channel	15 - 28	**7	240	380	1500	2100
		6	250	400	1450	2000
		4.5	260	410	1400	1950
		3	270	430	1100	1450
	29 - 45	*1.5	220	400	840	1060
		**7	550	760	1500	2100
		6	540	750	1450	2000
		4.5	530	730	1400	1950
		3	340	540	1100	1450
		*1.5	220	400	840	1060

* Minimum adjustable secondary pressure ** Maximum adjustable secondary pressure *** See NOTE on previous page

Discharge Capacity of Steam Trap

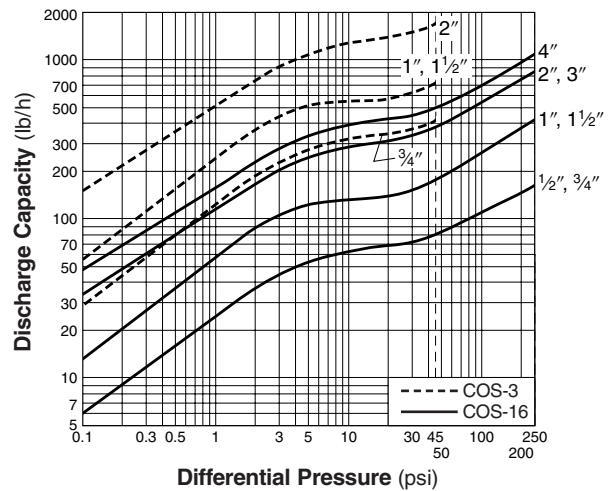


Note: 1. The discharge capacity is the maximum continuous condensate discharge 11 °F below saturated steam temperature.
2. The differential pressure is the difference between the COS inlet and its trap outlet pressure.



DO NOT use this product under conditions that exceed maximum differential pressure, as condensate backup will occur!

Dimensions

Screwed

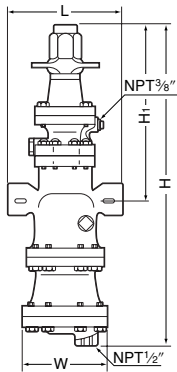


• COS-3 Screwed* (in)						
Size	L	H	H ₁	W	Weight (lb)	
3/4	6 7/8	19 1/2	11 1/4	4 1/8	33	
1	7 1/2	20 9/16	11 1/8	5 7/8	44	

* NPT, other standards available

• COS-16 Screwed* (in)						
Size	L	H	H ₁	W	Weight (lb)	
1/2	6 7/8	19 1/2	11 1/4	4 1/8	32	
3/4					33	
1	7 1/2	20 9/16	11 1/8	5 7/8	44	

* NPT, other standards available

Flanged

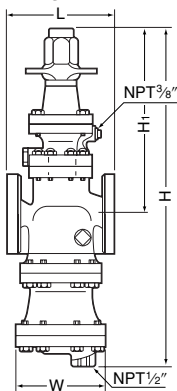

• COS-3 Flanged (in)						
Size	L		H	H ₁	W	Weight* (lb)
	ASME Class					
	125FF	250RF				
1	6 15/16	7 3/8	20 9/16	11 1/8	5 7/8	46
1 1/2	8 3/4	8 3/4	22 1/8	11 1/8	6 1/2	60
2	10	10 1/4	25	12 3/8	7 1/2	95

Class 125 FF can connect to 150 RF, 250 RF can connect to 300 RF
Other standards available, but length and weight may vary
* Weight is for Class 250 RF

• COS-16 Flanged (in)						
Size	L		H	H ₁	W	Weight* (lb)
	ASME Class					
	125FF	250RF				
1	6 15/16	7 3/8	20 9/16	11 1/8	5 7/8	46
1 1/2	8 3/4	8 3/4	22 1/2	11 1/8	6 1/2	60
2	10	10 1/4	25	12 3/8	7 1/2	95
3	14 3/8	15 1/8	34 1/4	16 1/8	11	159
4	17 1/8	17 11/16	40 1/8	17 3/8	13 3/4	231

Class 125 FF can connect to 150 RF, 250 RF can connect to 300 RF
Other standards available, but length and weight may vary
* Weight is for Class 250 RF

Size 1/2"- 1" shown.
Configuration of larger sizes differs slightly.

Flange classes in bold are standard

TLV CORPORATION

13901 South Lakes Drive, Charlotte, NC 28273-6790
Phone: 704-597-9070 Fax: 704-583-1610
E-mail: tlv@tlvengineering.com
For Technical Service 1-800 "TLV TRAP"



Manufacturer

ISO 9001/ISO 14001

